

# SHED SUPPLYS

# DOOR INSTALLATION GUIDE

PACKAGING: 2-DOORS - 1-LOCK HANDLE - 26 SCREWS

## INSTALLATION GUIDELINES

### ROUGH OPENINGS


2 - 24" X 72" UNPAINTED WOOD DOORS - 47 ¾ WIDE X 70 ¼ TALL

2 - 30" X 72" UNPAINTED WOOD DOORS – 59 ¾ WIDE X 70 ¼ TALL

2 – 30 ½ " X 72" FIBERGLASS DOORS – 61 ½" WIDE X 70 ¼" TALL

2 – 35 ¾" X 72" FIBERGLASS DOORS - 72" WIDE X 70 ¼" TALL

2 - 35 ¾ " X 78" FIBERGLASS DOORS – 72" WIDE X 76 ¼" TALL

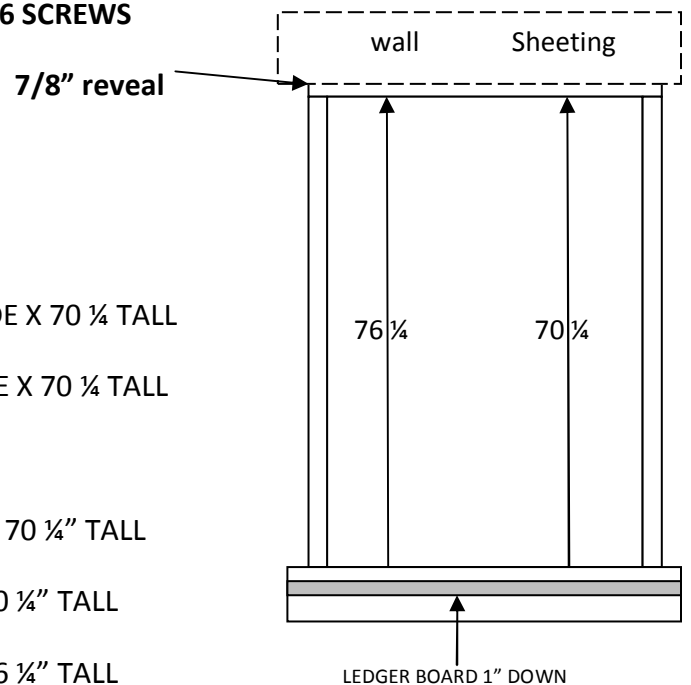

- 1.) SET LEDGER BOARD 1" DOWN FROM TOP OF FLOOR.
- 2.) SET LEFT DOOR ON LEDGER BOARD MOVE DOOR TO LEFT.
- 3.) HOLD OUTSIDE CUSTOMER SUPPLIED DOOR STYLE 3/8" ABOVE DOOR.
- 4.) MAKE SURE DOOR IS SQUARE AND LEVEL SCREW DOORS TO OUTSIDE DOOR STYLE.
- 5.) HOLD LEFT DOOR TIGHT AGAINST FLOOR DRILL TOP AND BOTTOM HOLES FOR BARREL BOLTS.
- 6.) SET RIGHT DOOR ON LEDGER BOARD ALLOW 1/4 " GAP BETWEEN DOORS
- 7.) ADD RIGHT OUTSIDE CUSTOMER SUPPLIED DOOR STYLE 3/8" ABOVE RIGHT DOOR. SCREW RIGHT DOOR TO STYLE.
8. ADD TOP DOOR STYLE
- 9.) ADD LOCK HANDLE TO DOOR SET BACK HANDLE WITH SET SCREW.